


Service Parts Information




BALANCED PISTON TYPE RELIEF VALVES

(F3)C*-10-*(V)(Y)-30




"Y" COVER ASSEMBLY
(SEE TABLE)

MODEL	◆ COVER	SPRING	■ SPRING	PRESSURE RANGE PSI	■ INCLUDED IN COVER S/A
C*-10-B-30	581700	291822	2280	125-1000	941286
C*-10-BV-30		291821			
C*-10-BVY-30	590304	291822			
C*-10-BY-30		291822			
C*-10-C-30	581700	291821	583937	500-2000	941287
C*-10-CV-30	291821				
C*-10-CVY-30	590304	291822			
C*-10-CY-30	581700	291822	2281	1500-3000	941288
C*-10-F-30		291821			
C*-10-FV-30	590304	291822			
C*-10-FVY-30	590304	291822			
C*-10-FY-30		291822			

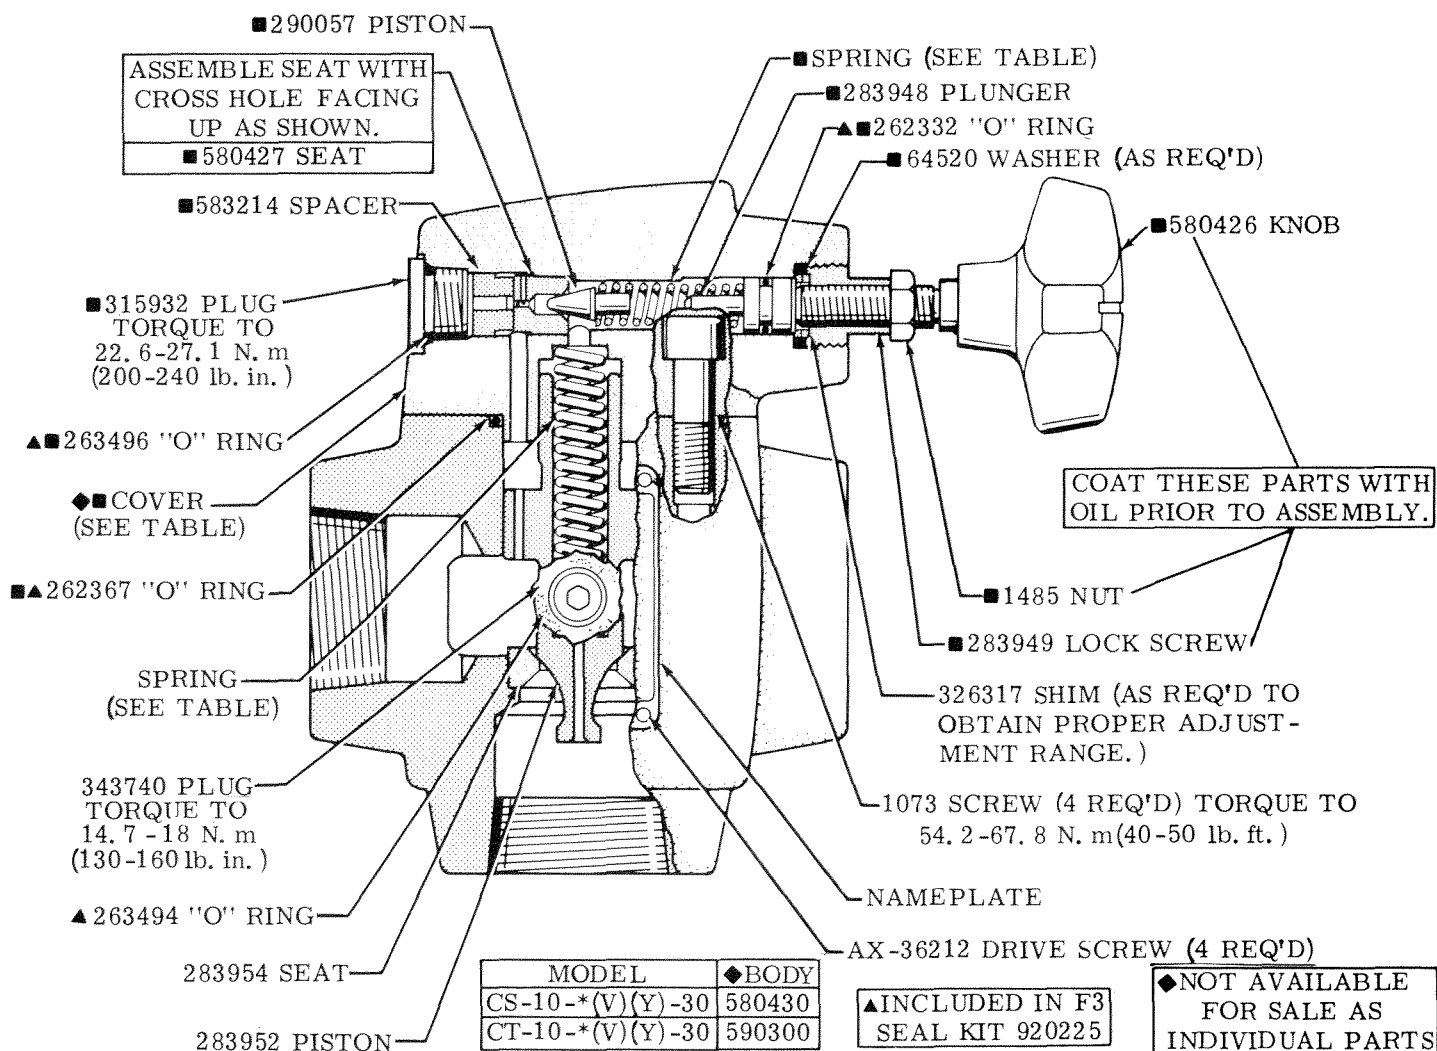

MODEL CODE BREAKDOWN

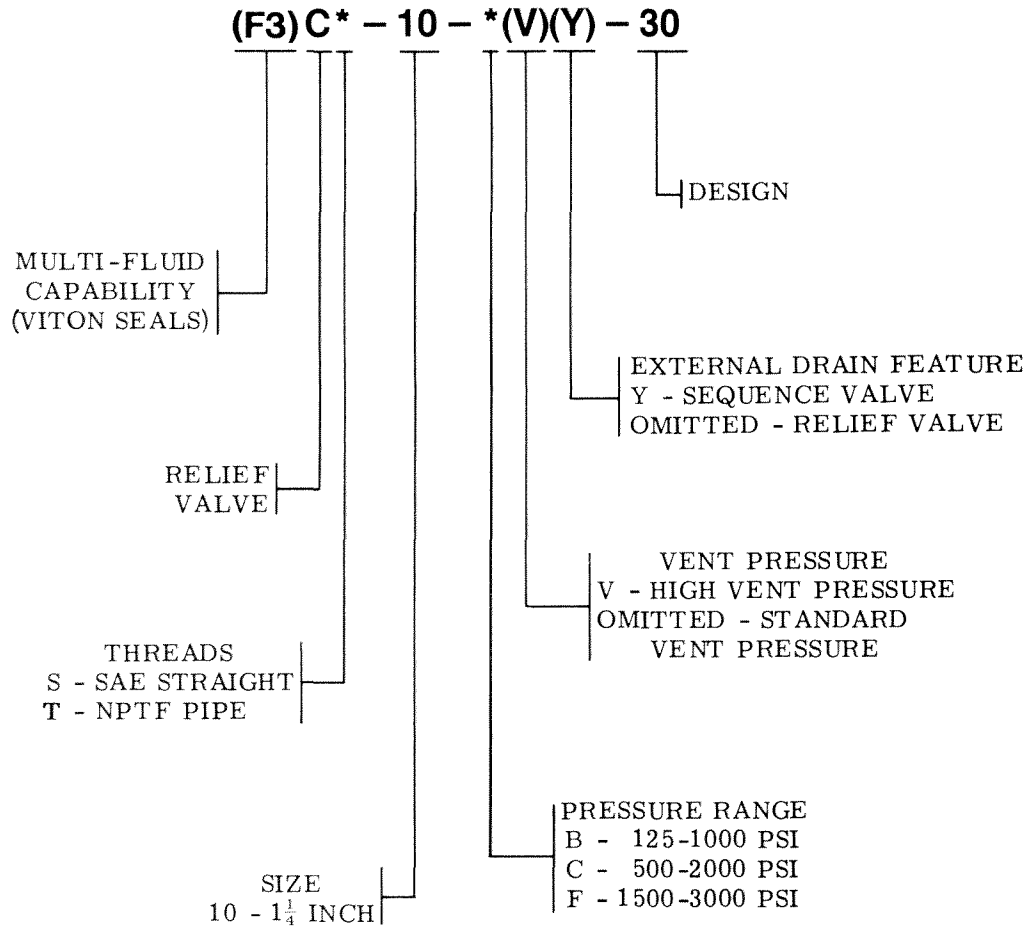

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Vickers OFF, OFR, and OFRS series are recommended.