

Service Parts Information




**MULTI-TORQUE
VANE MOTORS**


MHT 110/130/150 - 30 DESIGN

MODEL	RING	BEARING	SNAP RING	SHAFT	PLUG	KEY
MHT-110/55/55-N1-30	401623	_____	_____	_____	_____	_____
MHT-110/55/55-R1-30		373927	373434	356165	7074	334231
MHT-130/75/55-N1-30	375221	_____	_____	_____	_____	_____
MHT-130/75/55-R1-30		373927	373434	356165	7074	334231
MHT-150/75/75-N1-30	356176	_____	_____	_____	_____	_____
MHT-150/75/75-R1-30		373927	373434	356165	7074	334231

CAUTION
WHEN ASSEMBLING CARTRIDGE, INSERT VANES IN ROTOR SLOTS AT THE MINOR DIAMETER OF CAMRING. ROTATE CARTRIDGE ONE COMPLETE REVOLUTION PRIOR TO ASSY. WITH BODIES TO PREVENT MISALIGNMENT OF SPRINGS AND GUIDES.

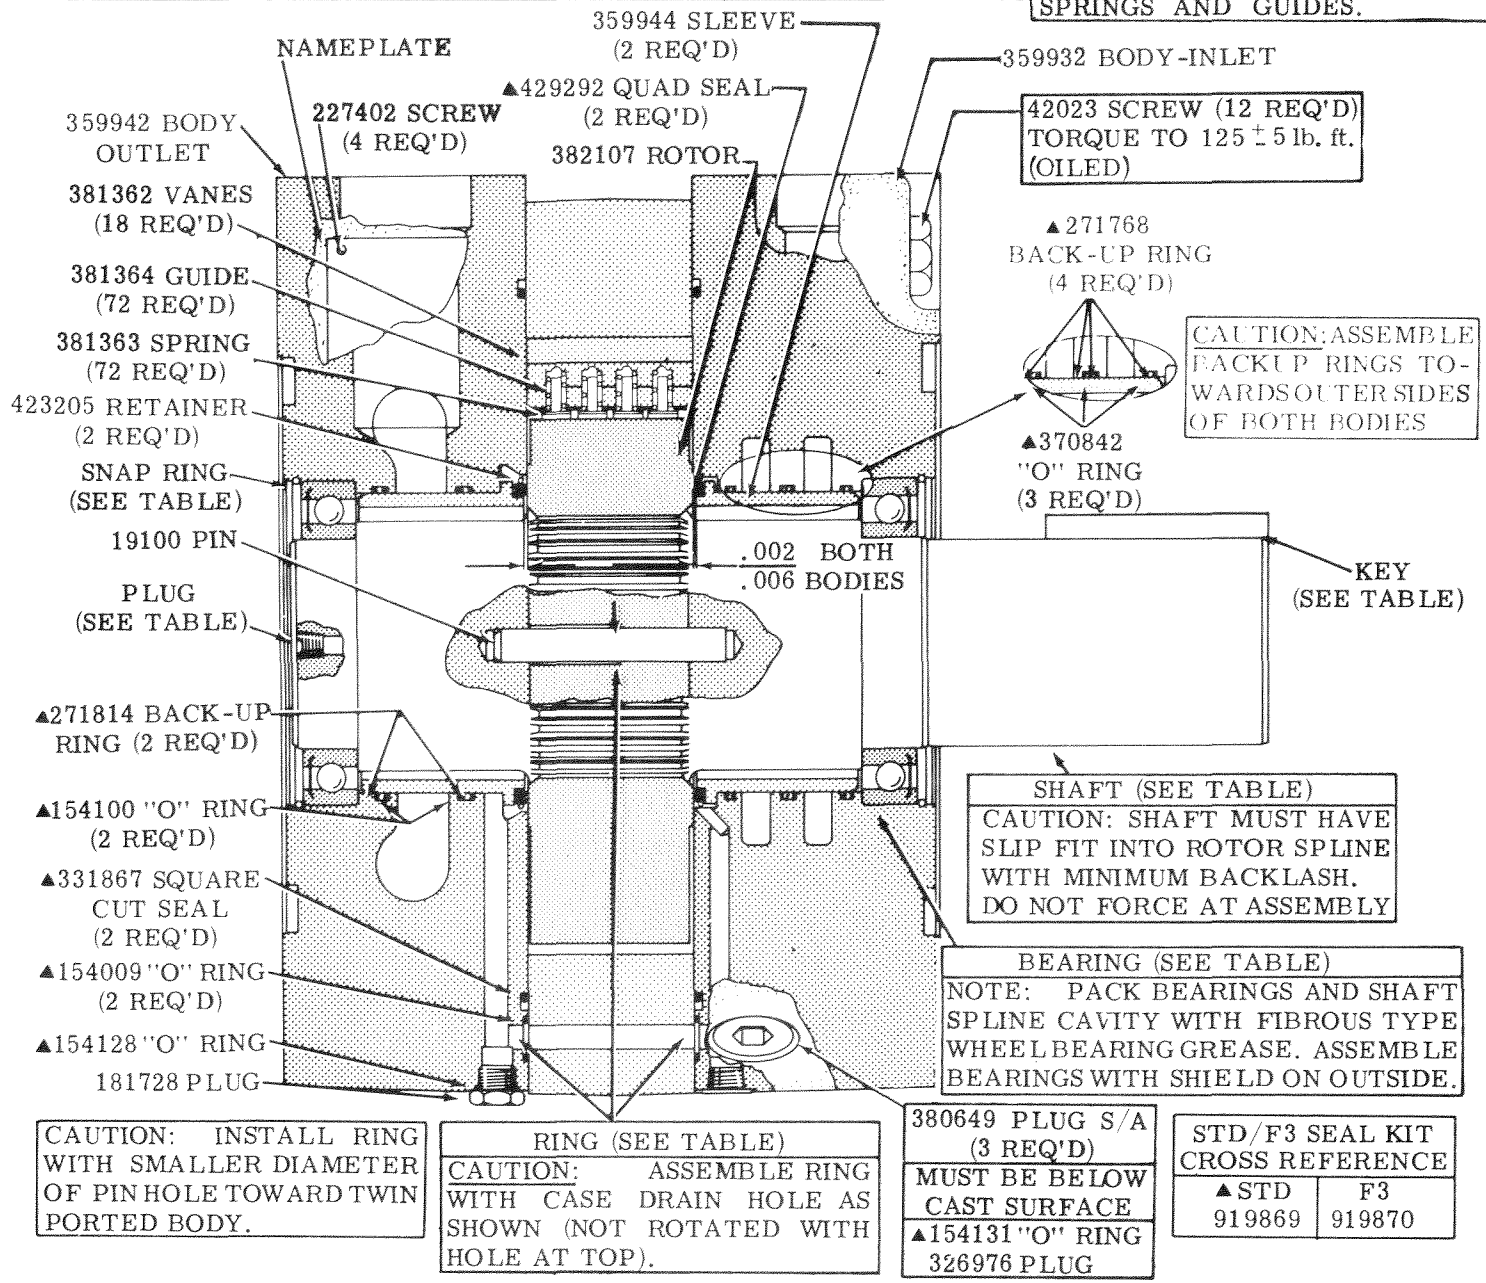

MODEL CODE BREAKDOWN

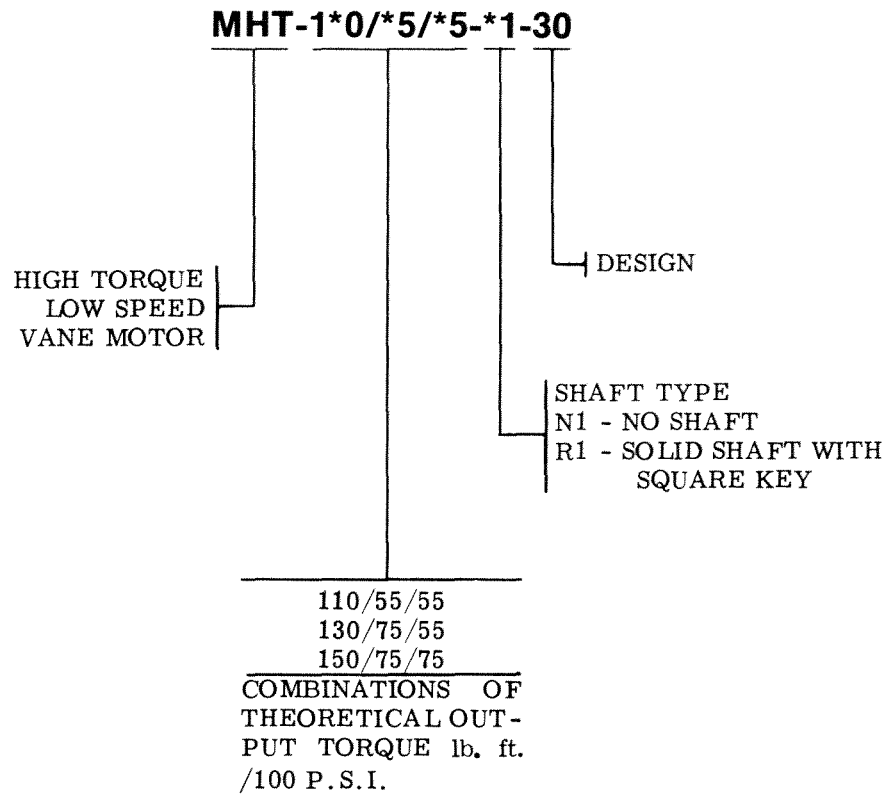

For satisfactory service life of these components in industrial applications, use full flow filtration to provide fluid which meets ISO cleanliness code 18/15 or cleaner. Selections from Vickers OFP, OFR, and OFRS series are recommended.