


VANE TYPE SINGLE PUMPS

MODEL CODE BREAKDOWN

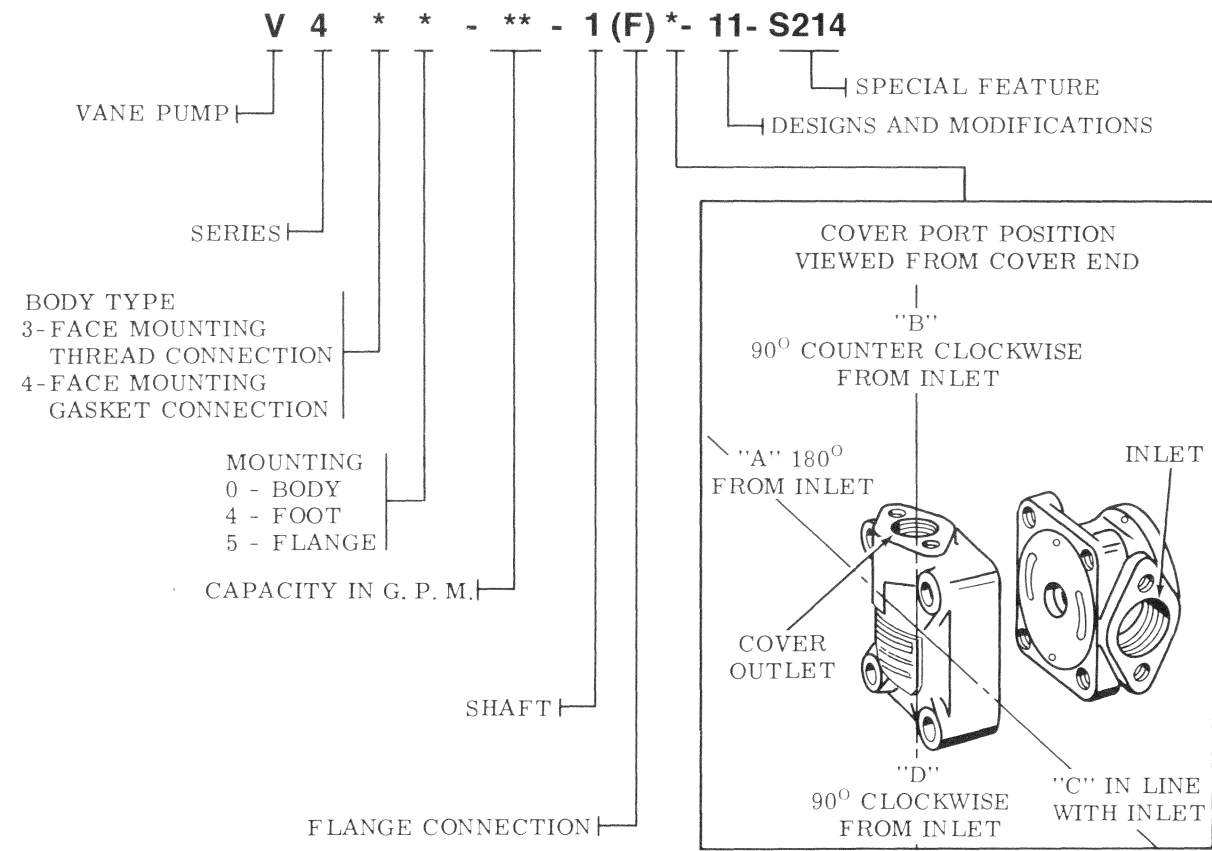

SERVICE PARTS INFORMATION

V400-S214

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns absolute or less is essential. (For information pertaining to Sperry Vickers economical 3 or 10 micron filters, see installation drawing 522140.)

Litho in U. S. A.


SPERRY VICKERS
TROY, MI. 48084

Revised 9-1-78

I-3107-S

COVER	FLANGE	SCREW (2 REQ'D)	"O" RING	CAPACITY	RING	ROTOR	VANE KIT (12 VANES)	"O" RING (2 REQ'D)	CARTRIDGE KIT
					INCLUDED IN CARTRIDGE KIT				
133895	—	—	—	V43*-28-1*-11-S214	128553	233304	912030	▲154105	919149
				V43*-36-1*-11-S214	126507				919150
134180	127841	1355	154077	V44*-28-1F*-11-S214	128553				919149
				V44*-36-1F*-11-S214	126507				919150

MODEL	SHAFT	KEY	NUT
V4**-*-1*-11-S214	126222	3418	—
V4**-*-3*-11-S214	117781	1615	132260
V4**-*-11*-11-S214	148266	—	—

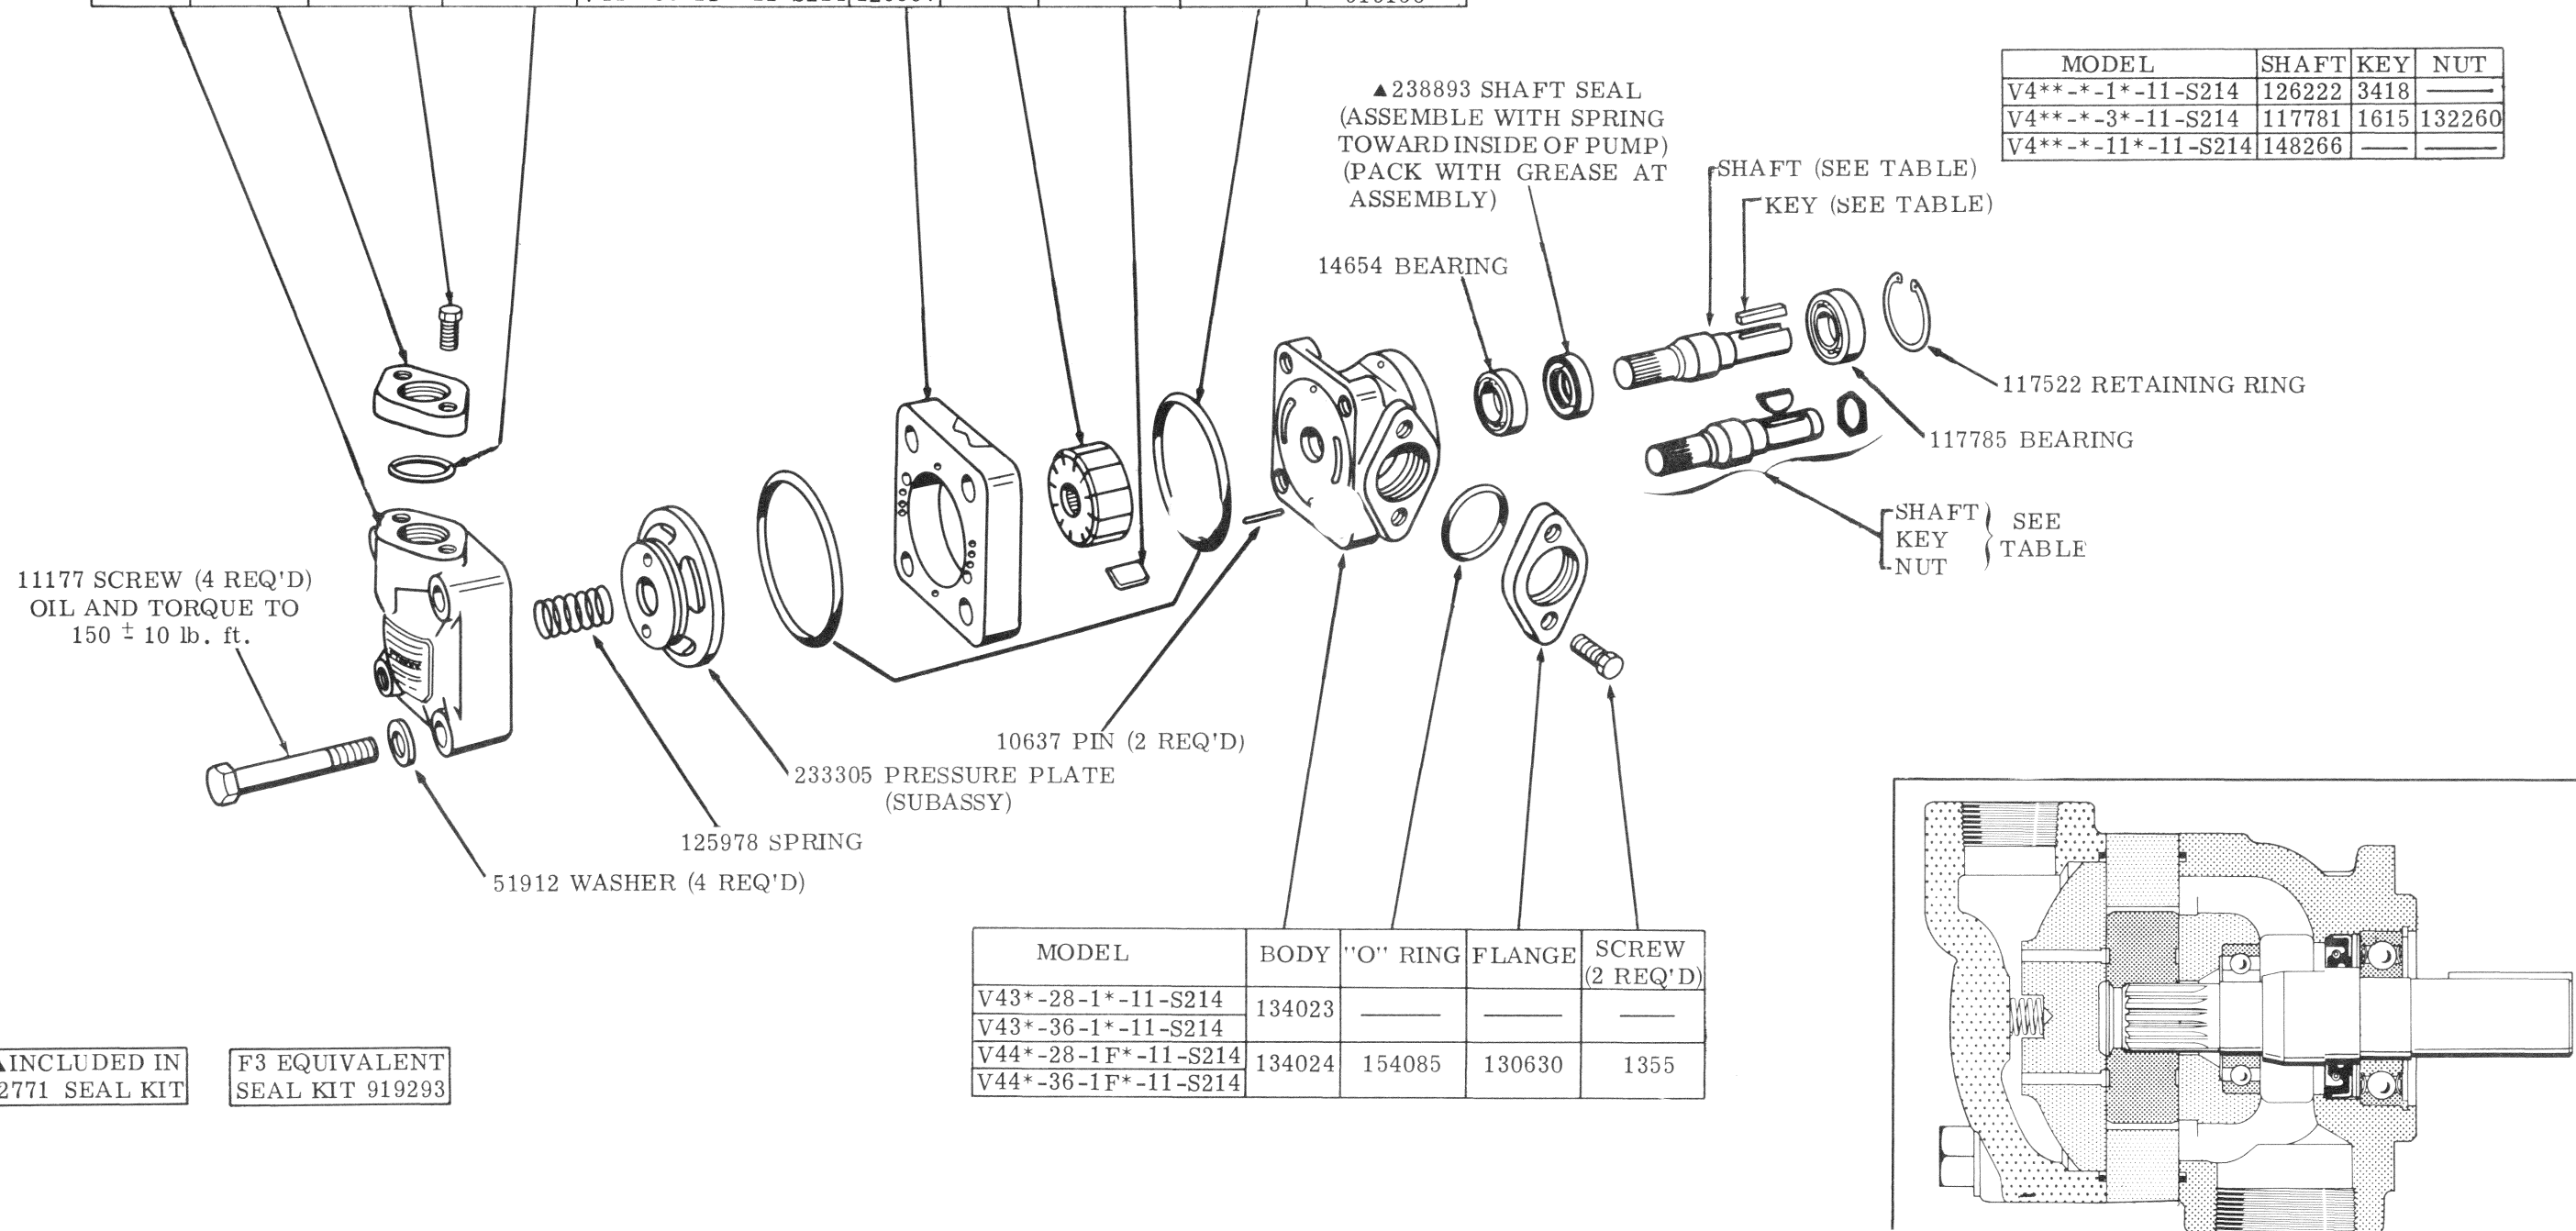

MODEL	BODY	"O" RING	FLANGE	SCREW (2 REQ'D)
V43*-28-1*-11-S214	134023	—	—	—
V43*-36-1*-11-S214		—	—	—
V44*-28-1F*-11-S214	134024	154085	130630	1355
V44*-36-1F*-11-S214		—	—	—

▲INCLUDED IN
922771 SEAL KIT

F3 EQUIVALENT
SEAL KIT 919293