
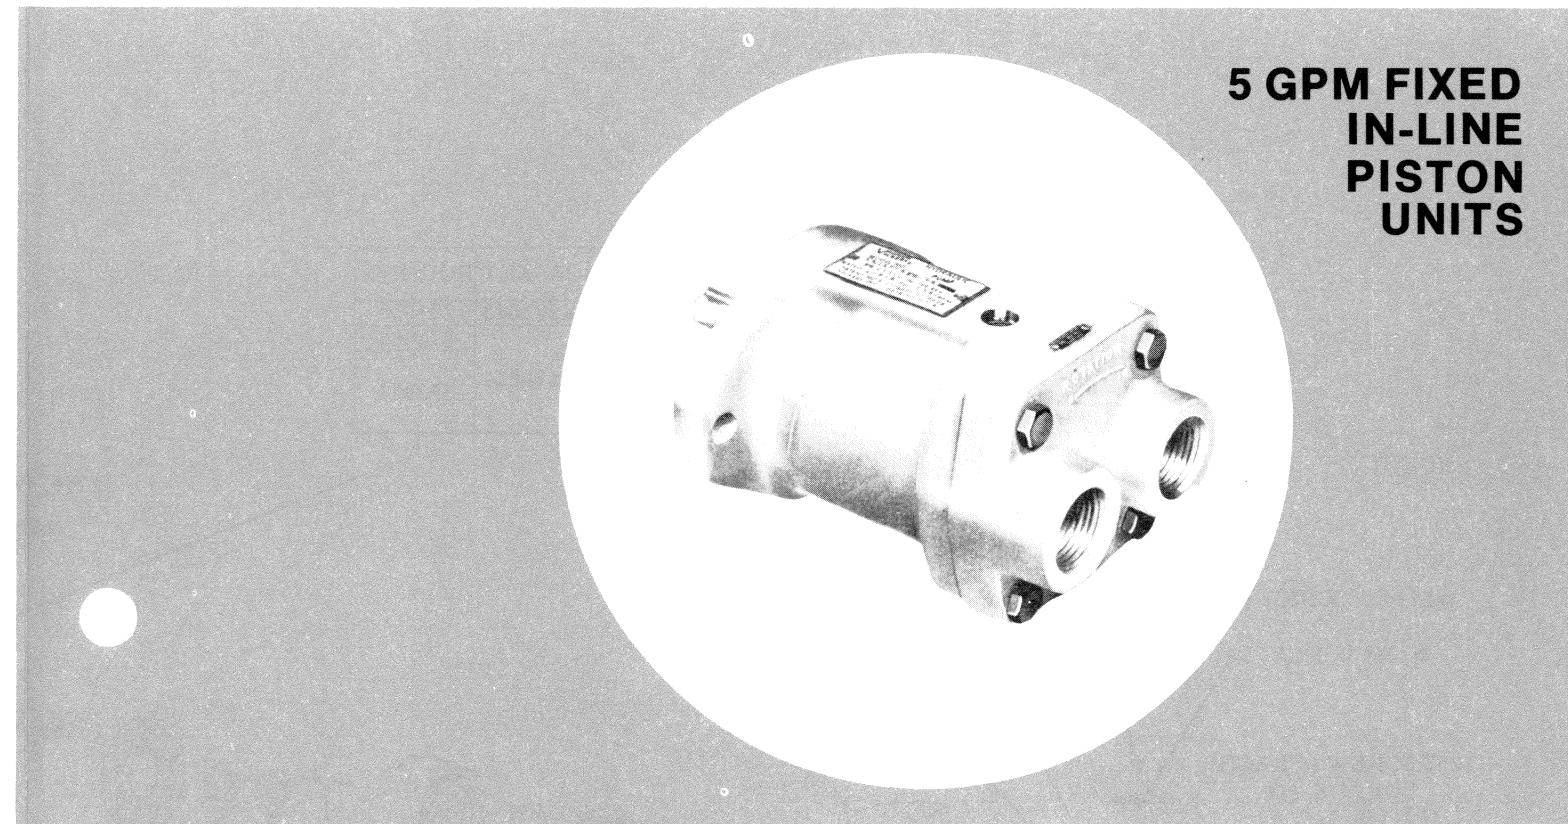


MODEL CODE BREAKDOWN

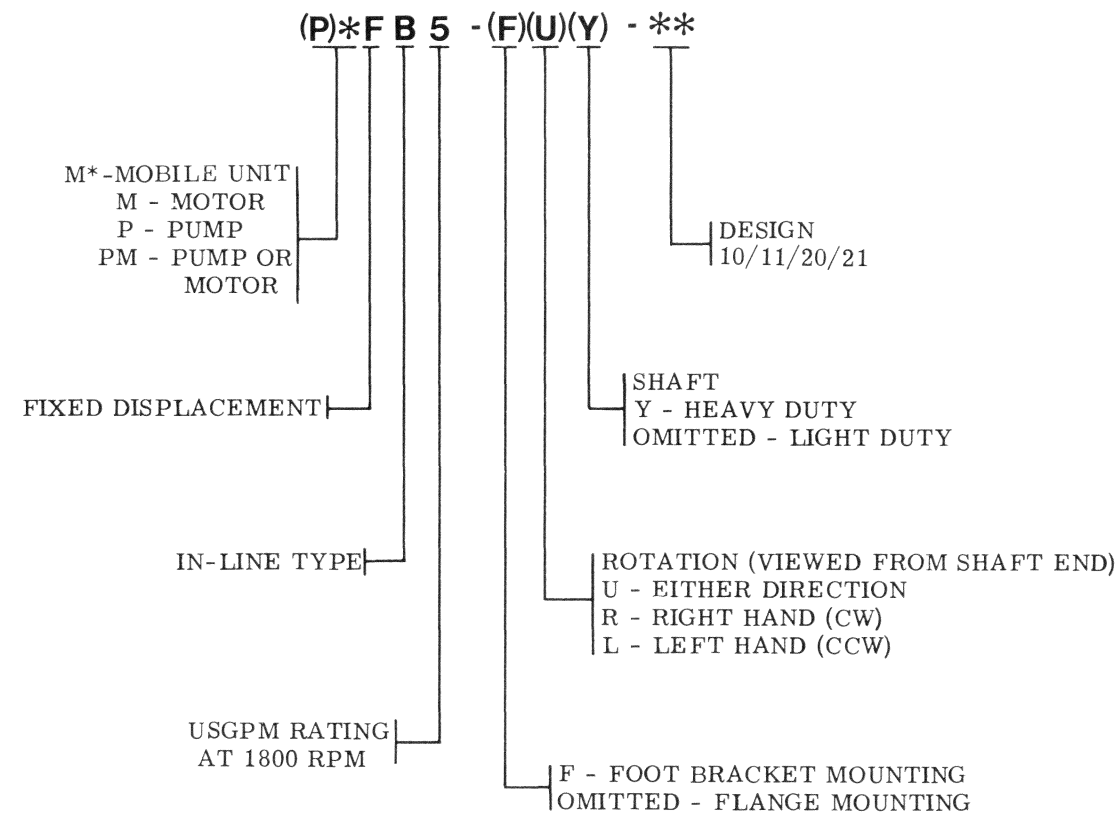

SERVICE PARTS INFORMATION

PFB5-(F)R(Y)-21
 PFB5-(F)L(Y)-21
 (M) *FB5-(F)U(Y)-11/20
 PMFB5-(F)U-10


To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns absolute or less is essential. (For information pertaining to Sperry Vickers economical 3 or 10 micron filters, see installation drawing 522140.)

Litho in U. S. A.

SPERRY VICKERS
 TROY, MI. 48084

Revised 9-1-77

I-3238-S

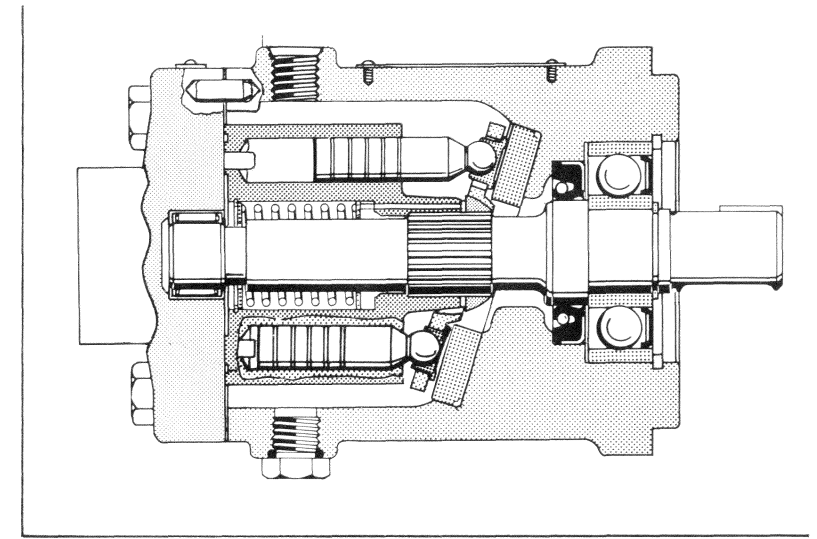

MODEL	● VALVE PLATE S/A	PIN (2 REQ'D)	GASKET	HOUSING
PMFB5-U-10	—	12987	▲231643	231559
*FB5-(F)U(Y)-11	938551	167237	▲279614	274668
FB-(F)U(Y)-20				
PFB5-(F)R(Y)-21	942313			
PFB5-(F)L(Y)-21	942314			323951

- 227401 SCREW (2 REQ'D)
- 164432 PLATE
- 1253 SCREW (4 REQ'D)
TORQUE TO
150-180 lbf. ft.
- 195060 ROTATION PLATE
(RIGHT HAND ROTATION)
- 227401 SCREW (2 REQ'D)
- 39465 BEARING
(SEAT AGAINST SHOULDER)

- ▲ 237014 SEAL
ASSEMBLE WITH SPRING
TOWARD INSIDE OF UNIT
- 190362 WASHER
USED ONLY ON
*FB5-(F)U(Y)-11/20/21
- 227401 SCREW (2 REQ'D)
NAMEPLATE
- 177939 SCREW (2 REQ'D)
(P)*FB5-F**-** ONLY

- 283233 BEARING
- 93653 RETAINING RING
- 140356 RETAINING RING
- FB-A-10
(INCLUDES SCREWS)

MODEL	PLUG	"O" RING
*FB5-(F)U(Y)-10/11	189087	▲154126
FB-(F)U(Y)-2*	181728	▲154128
PFB5-*R/L*-21		

MODEL	SHAFT	KEY
FB5-U-11/2	274669	157671
*FB5-UY-11/20	266161	142843
PFB5-*R/L*-21		
PMFB5-U-10	#274669	157671
M-MFB*-*G-20	295237	—

MODEL	RET. RING	LIFT LIMITER	SPRING	WASHER	CYLINDER BLOCK	PIN (3 REQ'D)	WASHER	WASHER	PLATE	PISTON S/A KIT	SWASH PLATE	ROTATING GROUP KIT
PMFB5-U-10					274670	248203	274956	275485	274249	942229	319245	938260
PFB5-(F)U(Y)-11/20/21	165385	273409	274787	275474	316000							938262
(M)-MFB5-(F)U(Y)-11/20					290059							938265
M-MFB6-** -20			272015							942350	344049	922994

● INCLUDED IN VALVE PLATE S/A

F3 EQUIVALENT SEAL KIT 919311

▲ INCLUDED IN 919239 SEAL KIT

#WHEN ORDERING THIS SHAFT, ALSO ORDER 273409 LIFT LIMITER