



SPERRY VICKERS

MODEL CODE BREAKDOWN

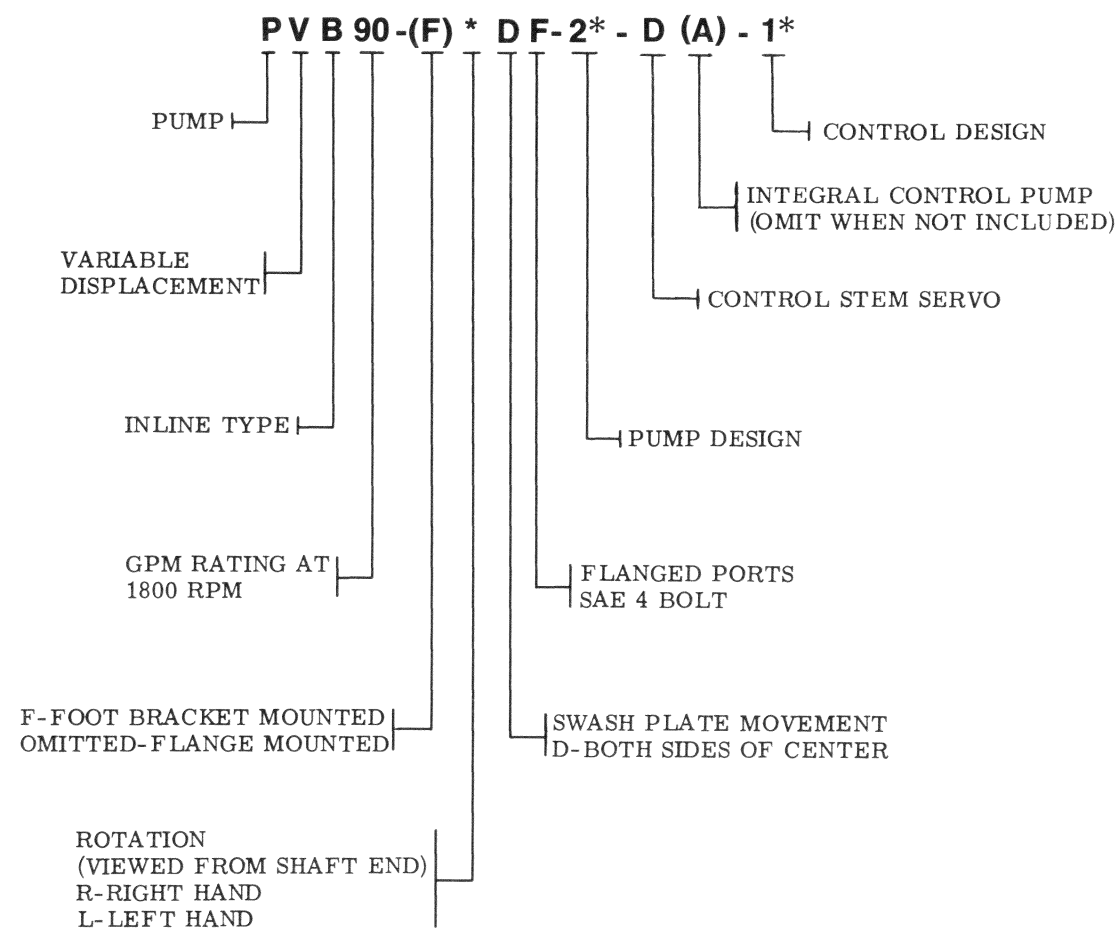

**90 GPM VARIABLE
DELIVERY
IN-LINE
PISTON
PUMPS**

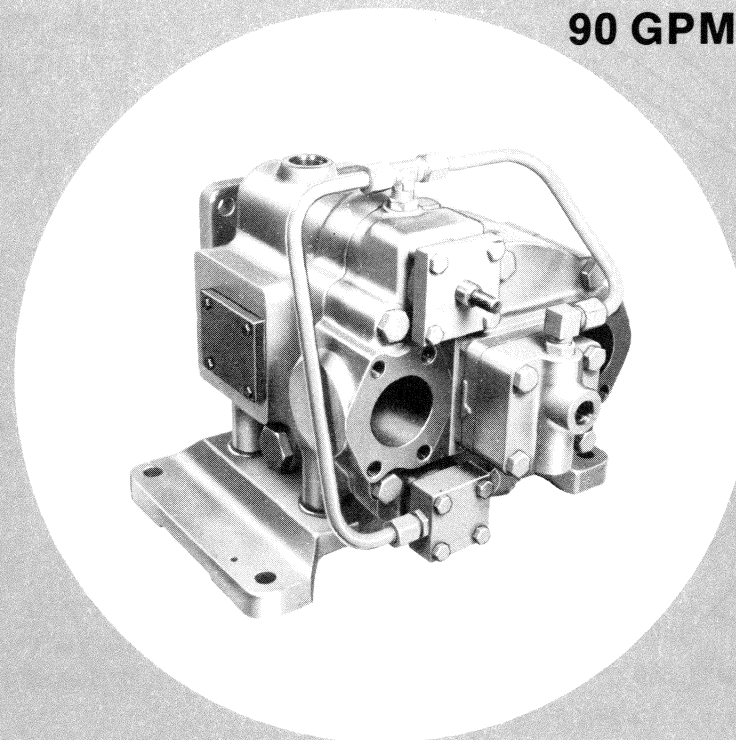

**SERVICE
PARTS
INFORMATION**

PVB90-(F)*DF-2*-D(A)-1*

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns absolute or less is essential. (For information pertaining to Sperry Vickers economical 3 or 10 micron filters, see installation drawing 522140.)


Litho in U. S. A.

SPERRY VICKERS
TROY, MI. 48084

Revised 4-1-76

I-3289-S

VANE PUMP AND TUBING PARTS FOR -DA MODEL ONLY

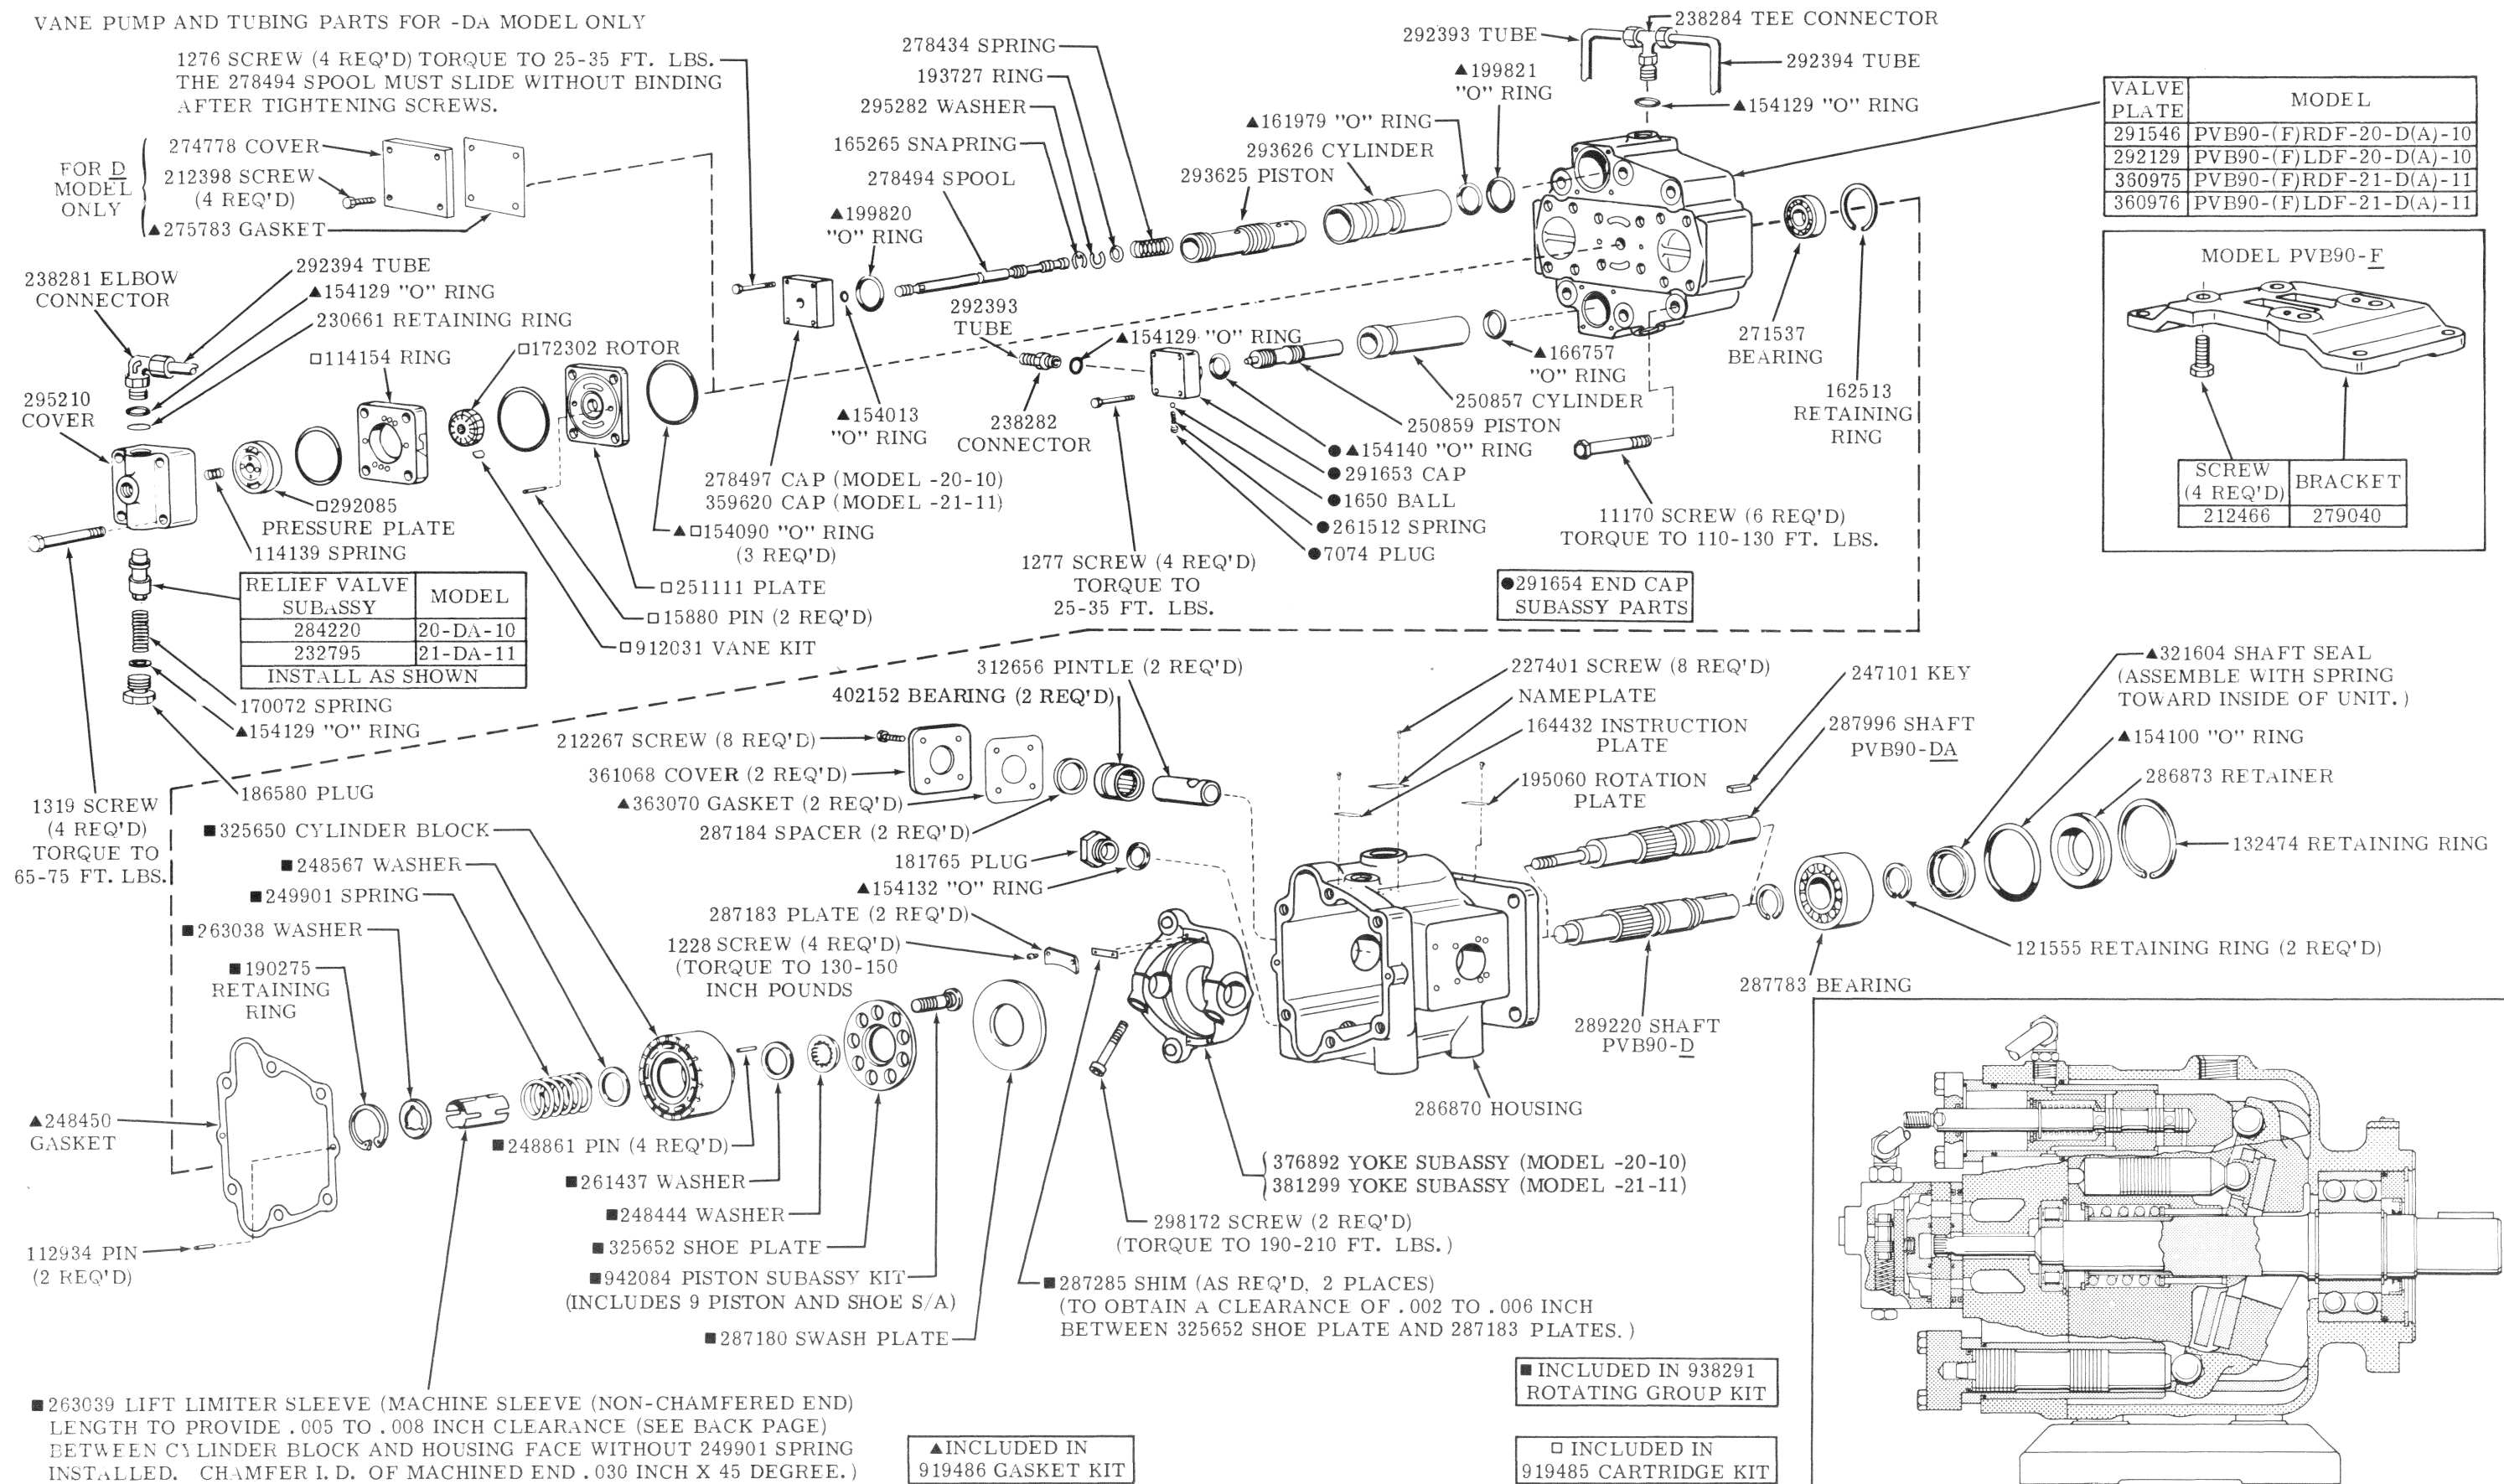

VALVE PLATE	MODEL
291546	PVB90-(F)RDF-20-D(A)-10
292129	PVB90-(F)LDF-20-D(A)-10
360975	PVB90-(F)RDF-21-D(A)-11
360976	PVB90-(F)LDF-21-D(A)-11

