
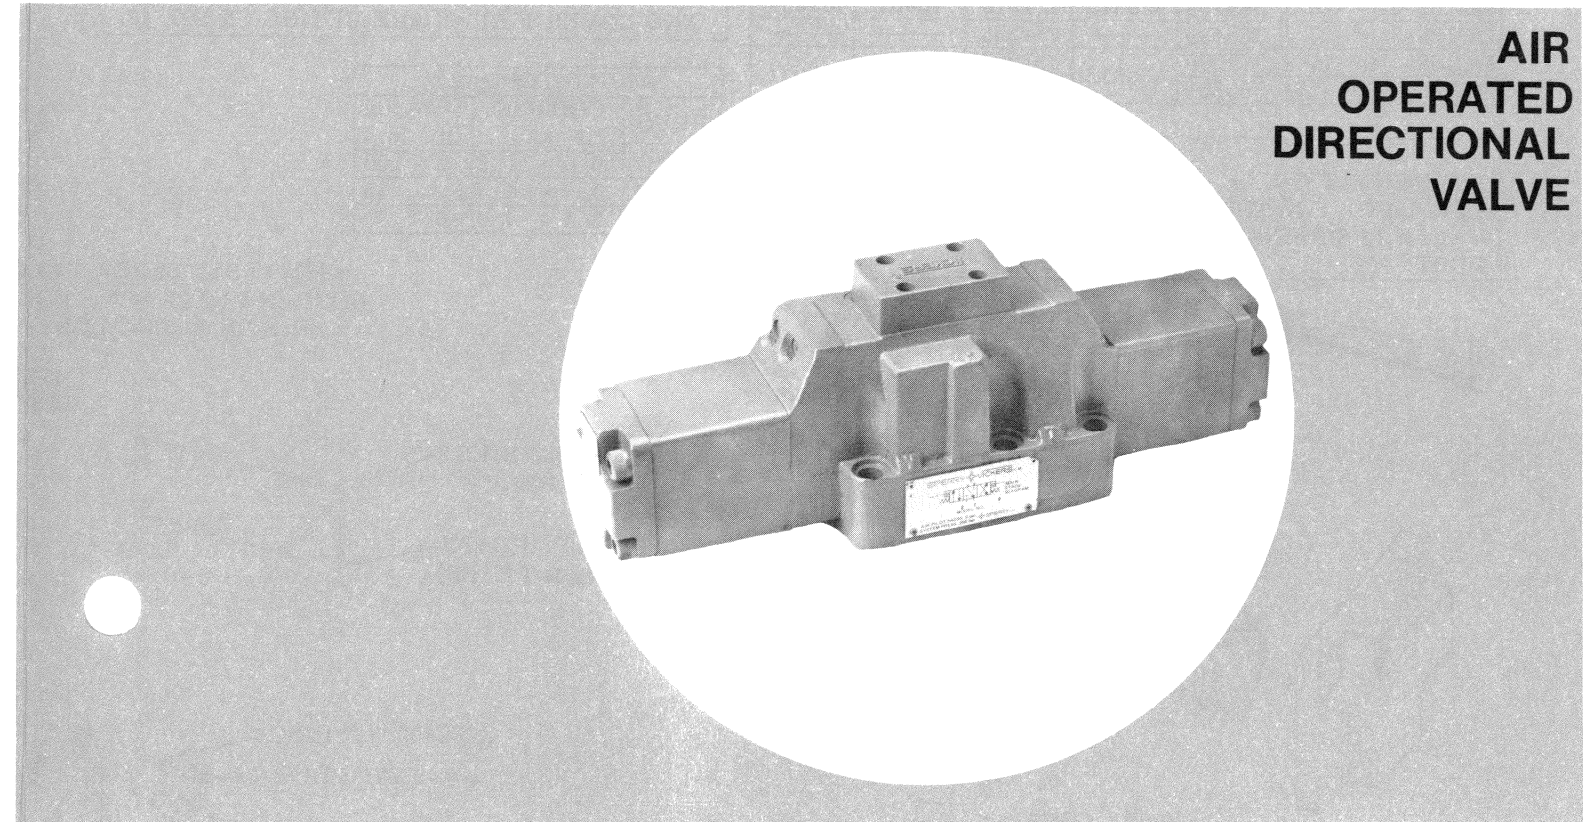


**MODEL CODE BREAKDOWN**

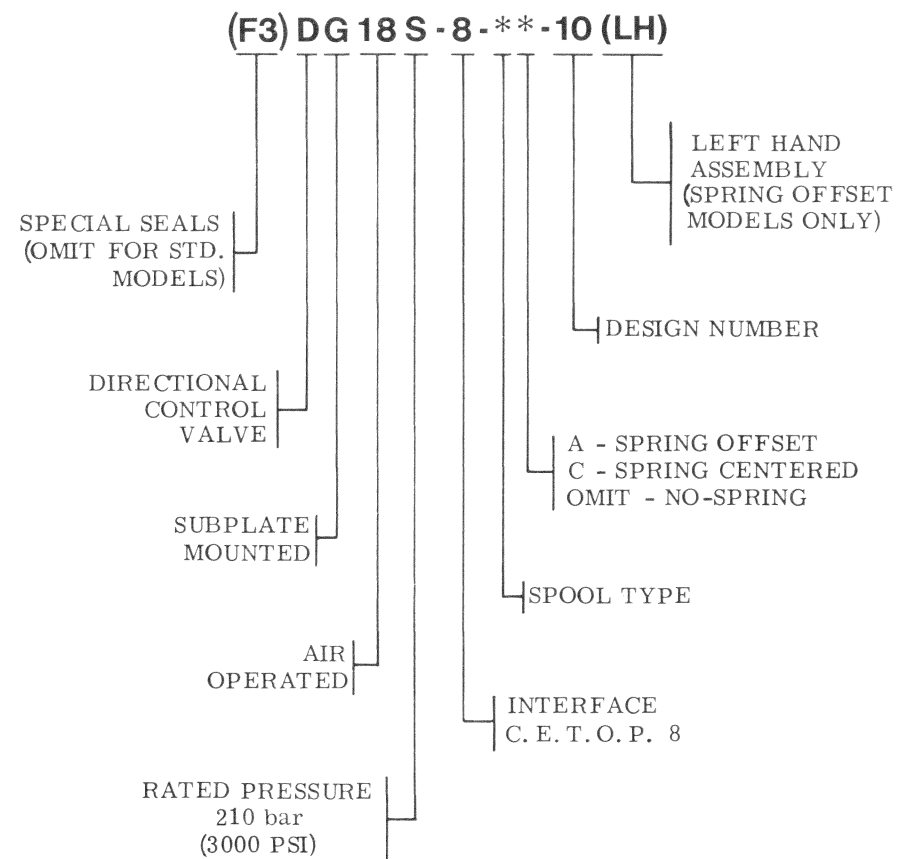

**AIR  
OPERATED  
DIRECTIONAL  
VALVE**

**SERVICE  
PARTS  
INFORMATION**

- DG18S-8-\*A-10(LH)
- DG18S-8-\*C-10
- DG18S-8-\*-10

To insure sustained efficiency and maximum trouble-free life of this precision equipment, initial and continuous filtration of the fluid medium to 25 microns absolute or less is essential. (For information pertaining to Sperry Vickers economical 3 or 10 micron filters, see installation drawing 522140.)

