

MODEL CODE BREAKDOWN

TA 19 R - 2 * * - 21 - ***

1 2 3 4 5 6 7 8

1 Transmission pump

2 Flow rating

@ 1800 rpm
19 - 19 USgpm

3 Rotation
(Viewed from shaft end)

R - Right hand (CW)
L - Left hand (CCW)

4 Input shaft

2 - SAE B-B Spline

5 Control pintle
(Location viewed from shaft end w/drain port up.)

A - Right hand
B - Left hand

6 Main relief valve

R - Relief valve
O - No relief valve

7 Design


8 Special feature

VICKERS
A TRINNOVA COMPANY

Service Parts Information

Variable
Transmission
Pump with
Charge
Pump

TA19*-***-21

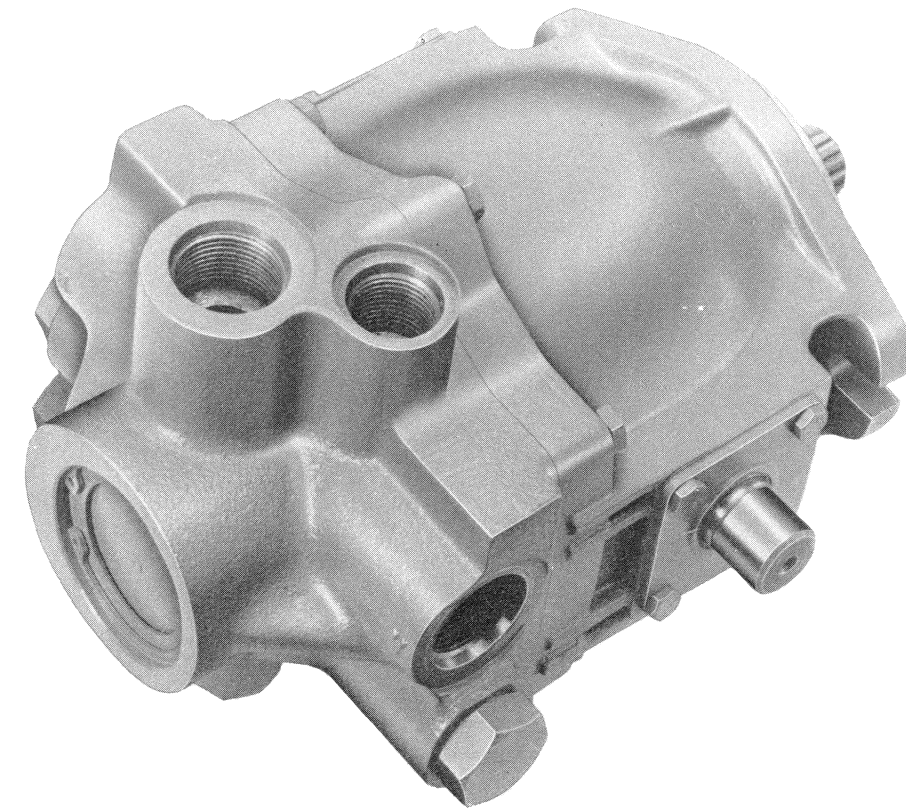

Vickers, Incorporated

P.O. Box 302
Troy, Michigan 48007-0302

Revised 11-1-89

M-2838-S

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 16/13 or cleaner. Selections from pressure, return, and in-line filter series are recommended.

