





THRU-DRIVE MODELS

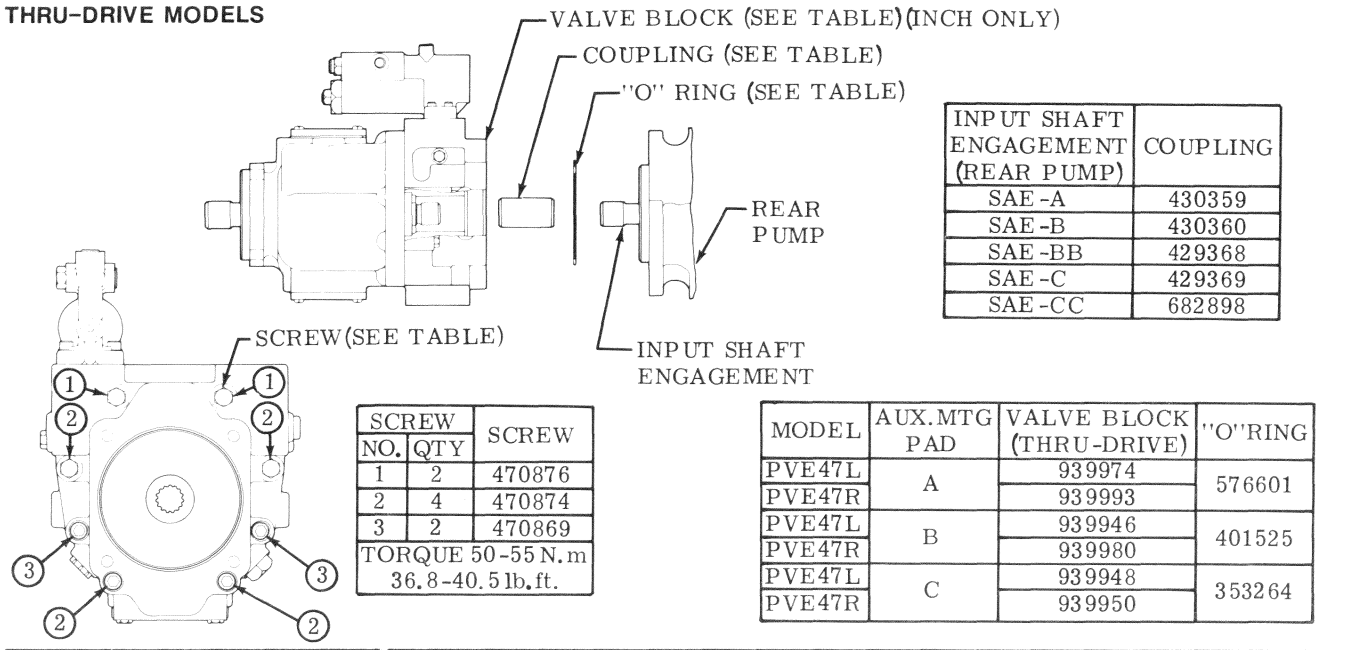


MODEL CODE BREAKDOWN

PVE47*-**-(M)(D)-22-C25V-21

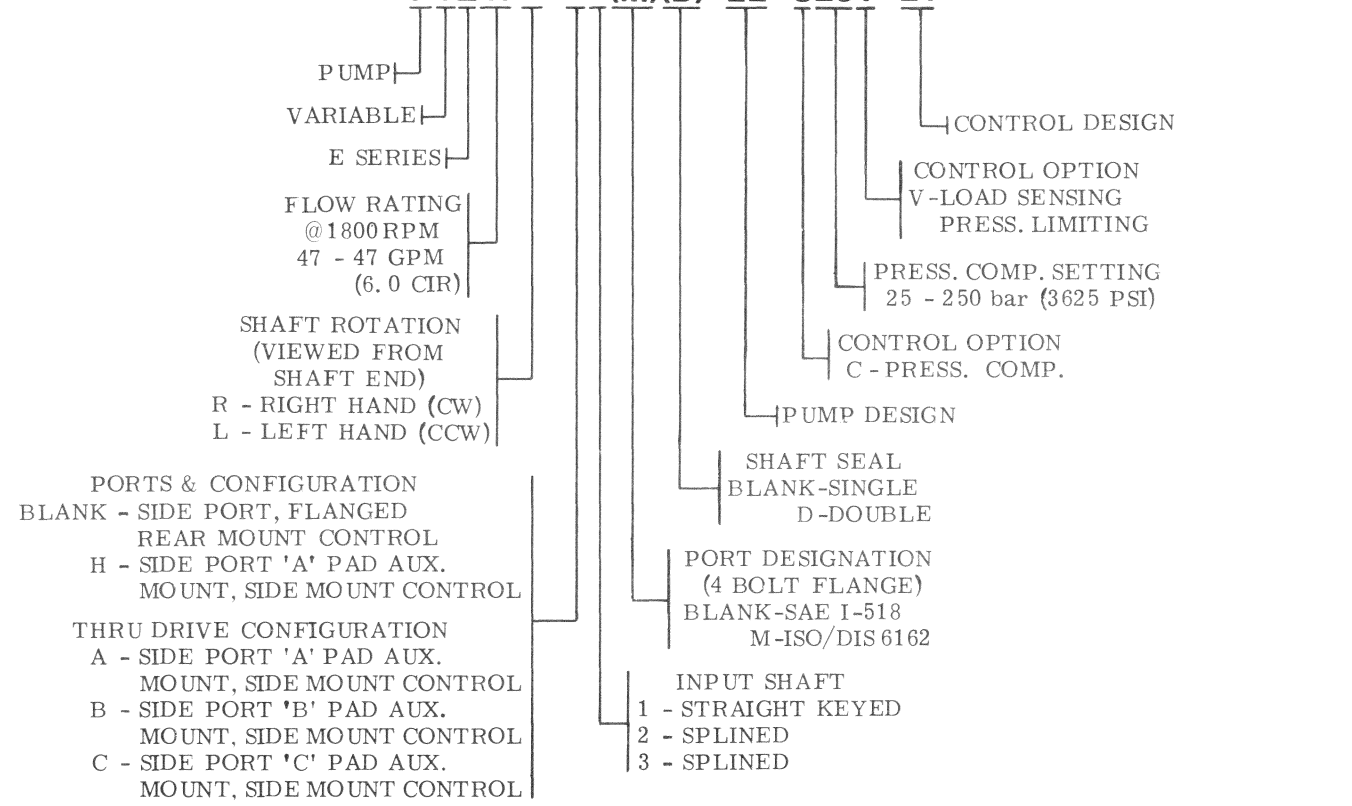

Heavy Duty Piston Pump
 Standard/Thru Drive


PVE47*-**-(M)(D)-22-C25(V)-21

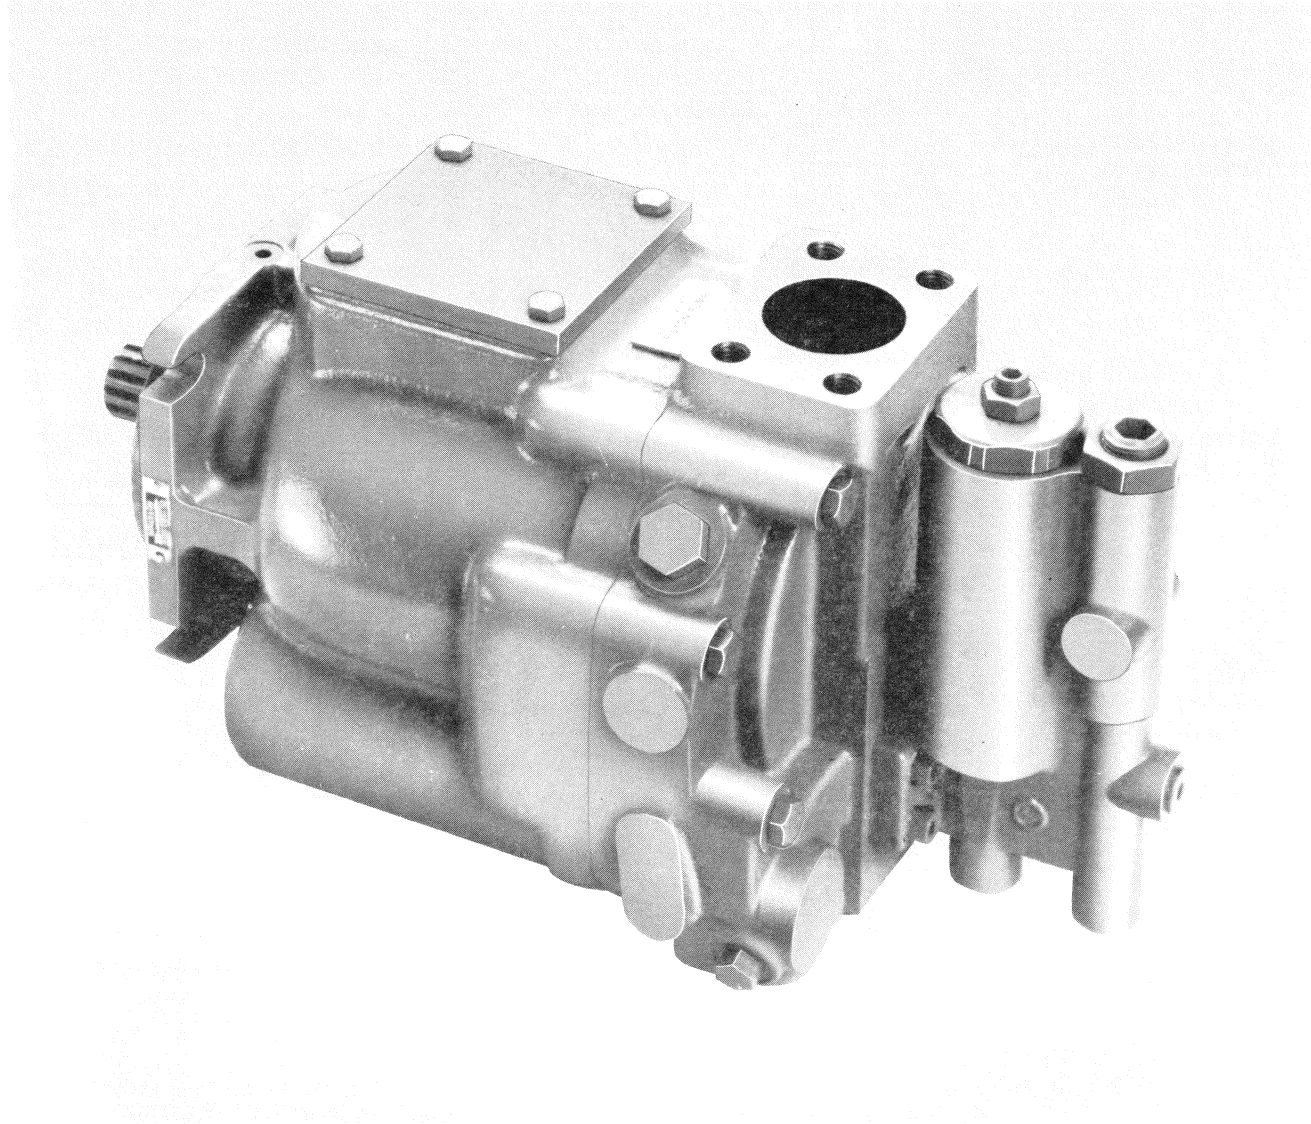

Vickers Incorporated
 A TRINOVA Company
 5445 Corporate Drive
 P.O. Box 302
 Troy, Michigan 48007-0302
 U.S.A.

For satisfactory service life of these components, use full flow filtration to provide fluid which meets ISO cleanliness code 19/15 or cleaner. Selections from Vickers OFP, OFR, and OFRS series are recommended.

Litho in U. S. A.

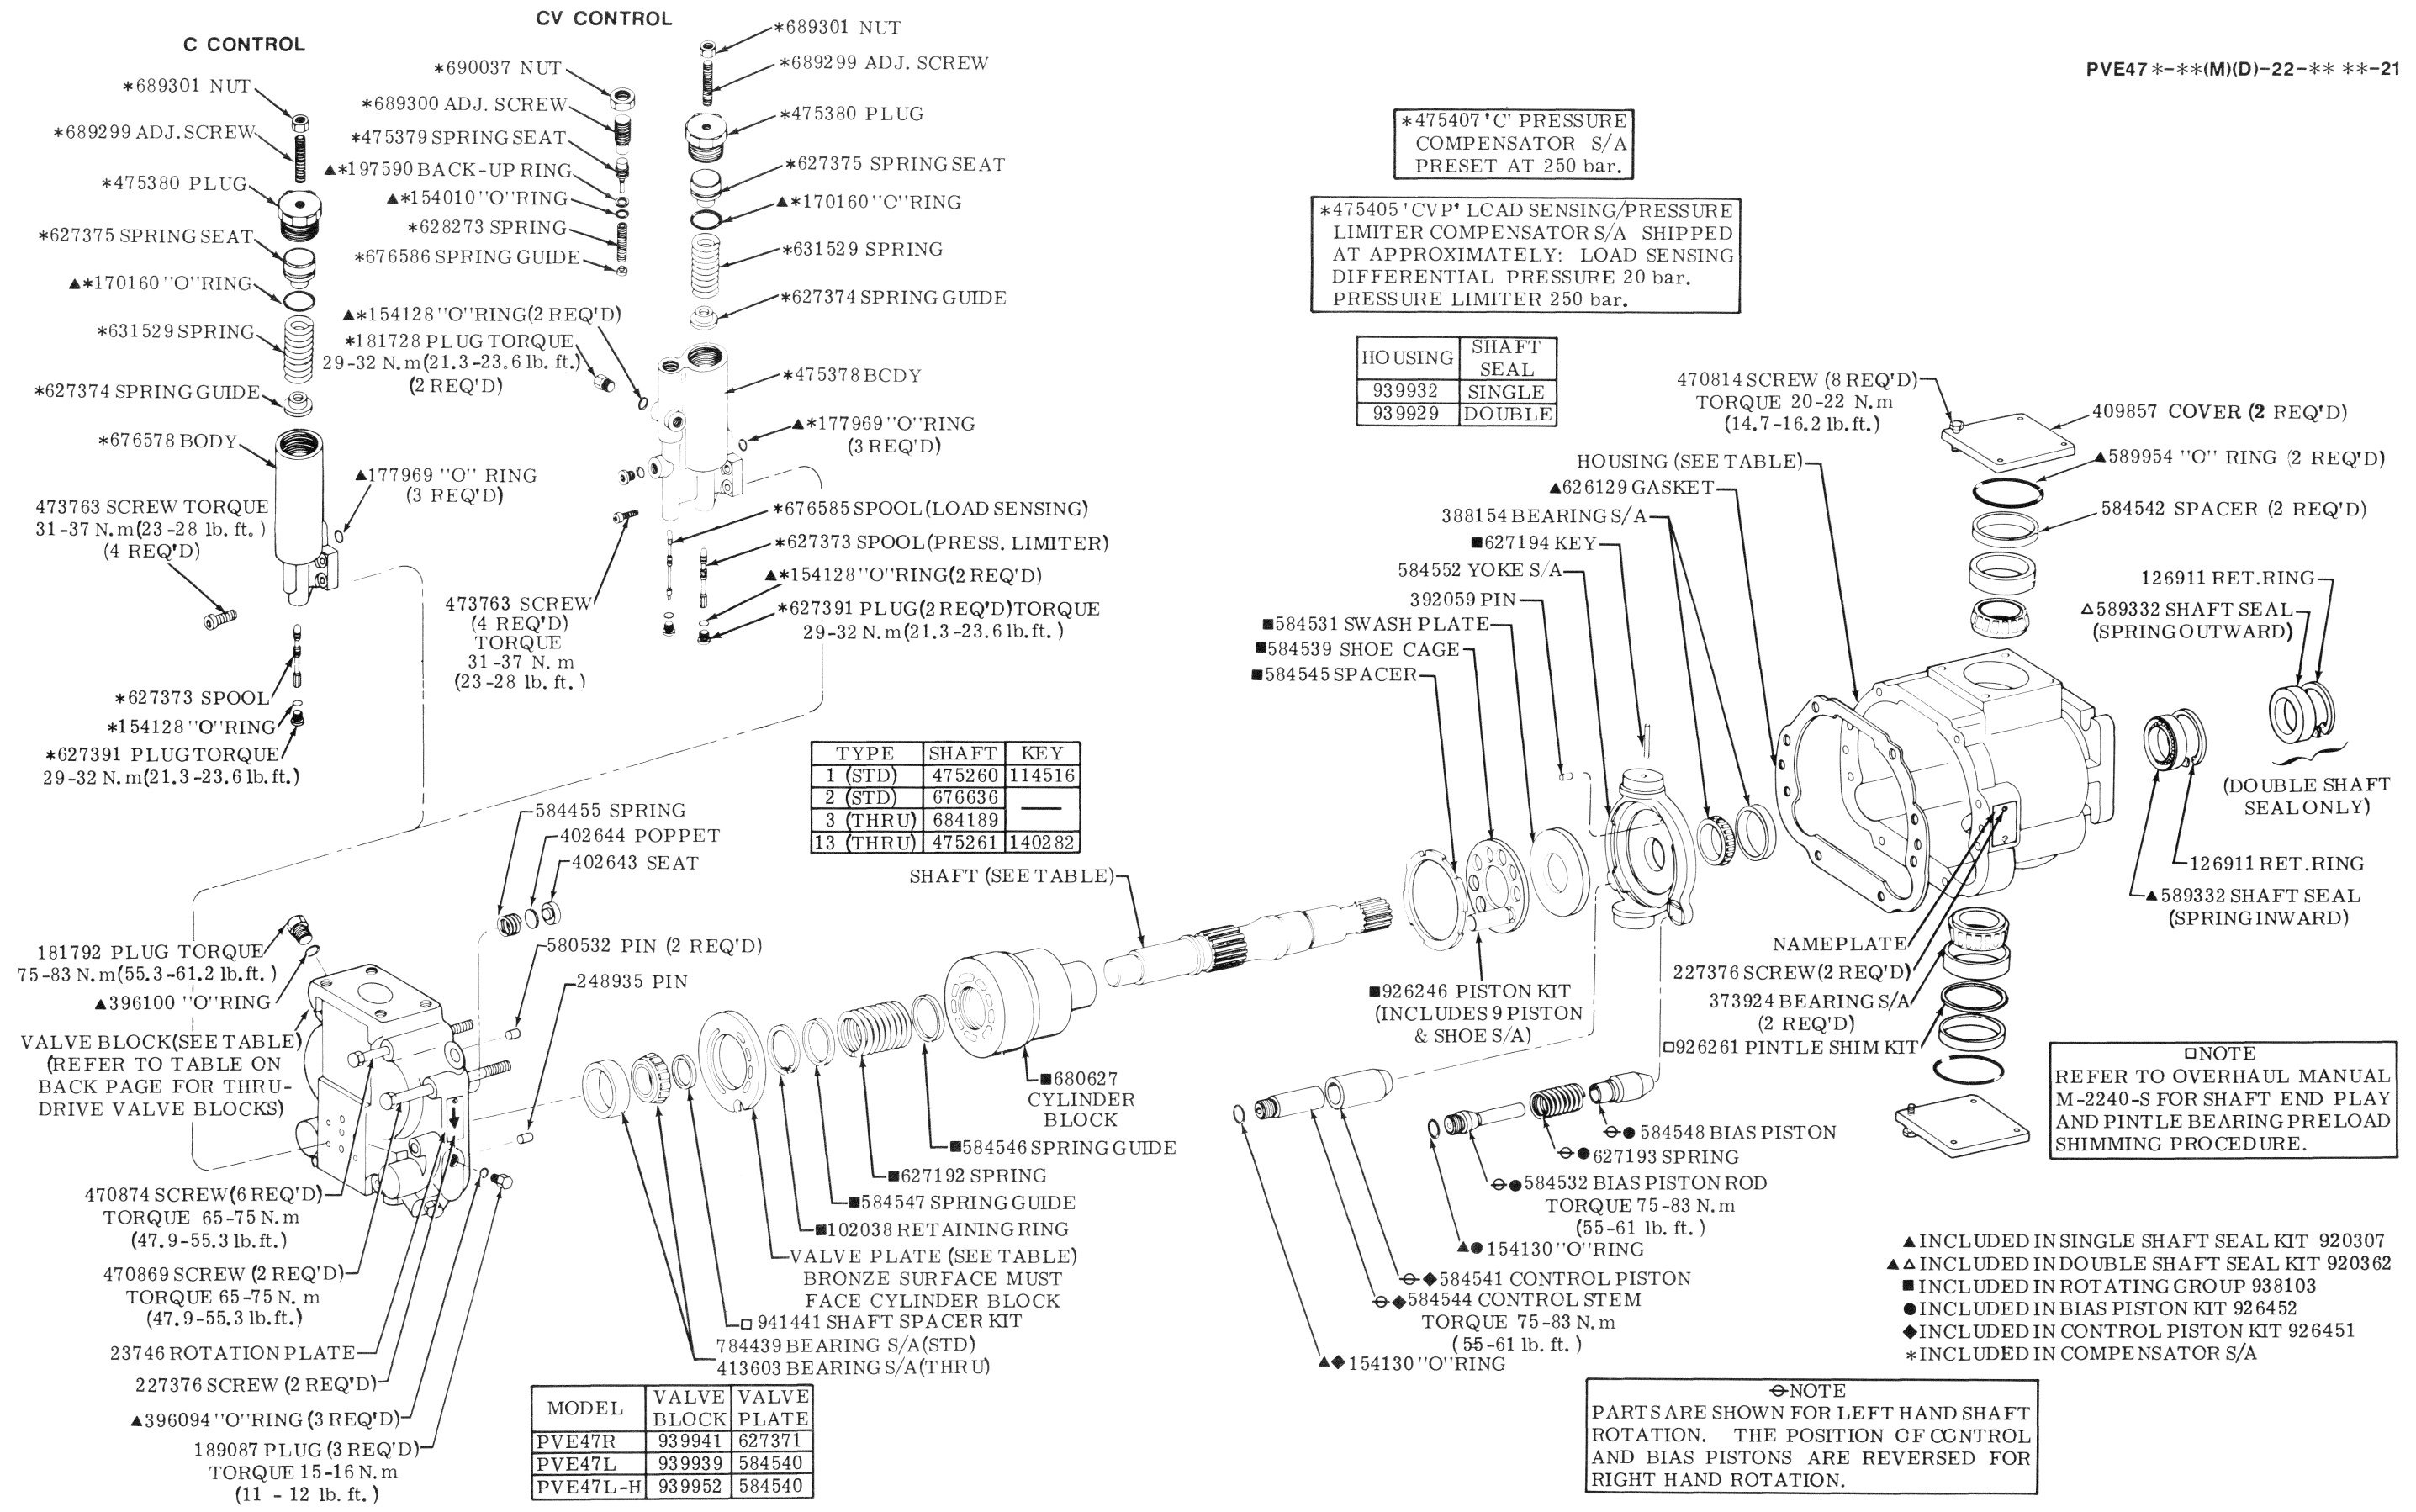

*475407 'C' PRESSURE COMPENSATOR S/A PRESET AT 250 bar.

*475405 'CVP' LOAD SENSING/PRESSURE LIMITER COMPENSATOR S/A SHIPPED AT APPROXIMATELY: LOAD SENSING DIFFERENTIAL PRESSURE 20 bar. PRESSURE LIMITER 250 bar.

HOUSING	SHAFT SEAL
939932	SINGLE
939929	DOUBLE

TYPE	SHAFT	KEY
1 (STD)	475260	114516
2 (STD)	676636	—
3 (THRU)	684189	—
13 (THRU)	475261	140282

MODEL	VALVE BLOCK	VALVE PLATE
PVE47R	939941	627371
PVE47L	939939	584540
PVE47L-H	939952	584540

NOTE REFER TO OVERHAUL MANUAL M-2240-S FOR SHAFT END PLAY AND PINTLE BEARING PRELOAD SHIMMING PROCEDURE.

NOTE PARTS ARE SHOWN FOR LEFT HAND SHAFT ROTATION. THE POSITION OF CONTROL AND BIAS PISTONS ARE REVERSED FOR RIGHT HAND ROTATION.

- ▲ INCLUDED IN SINGLE SHAFT SEAL KIT 920307
- ▲ INCLUDED IN DOUBLE SHAFT SEAL KIT 920362
- INCLUDED IN ROTATING GROUP 938103
- INCLUDED IN BIAS PISTON KIT 926452
- ◆ INCLUDED IN CONTROL PISTON KIT 926451
- * INCLUDED IN COMPENSATOR S/A